

## ESA Series

### 3-10kW/5-48kWh | Single Phase Home Storage Solution (HV)

The GoodWe ESA Series is a fully integrated all-in-one solar and storage solution that combines inverter and battery in a pre-wired, modular design-making installation significantly faster and easier. Engineered for flexibility, the ESA system allows seamless expansion to meet evolving energy needs, with scalable battery capacity for future upgrades. With its streamlined setup, the ESA Series can reduce installation time by up to 50%, making it an ideal choice for efficient and adaptable residential energy systems. It also supports dynamic tariff optimization with AI-driven EMS.



#### Optimized Performance

- 1C charge/discharge for rapid energy cycling
- Fanless design for quiet operation, noise <30dB
- 20A per string & 200% PV oversizing



#### Flexible & Adaptable Applications

- Dual output ports for simplified installation & off-grid capability
- Flexible battery mixing with different capacity or old&new batteries
- Support full backup load with 63A output



#### Superb Safety & Reliability

- Advanced 6-layer safety protection
- Heating mode ensures reliable performance even in -20°C
- AI-driven AFCI 3.0 for safety<sup>1</sup>



#### Smart Control & Monitoring

- Ready for AI-driven EMS
- Seamless switching to backup <4ms
- One-click upgrade & one-click configuration

Technical Data		GW3K-EHA-G20	GW3.6K-EHA-G20	GW5K-EHA-G20	GW6K-EHA-G20	GW8K-EHA-G20	GW10K-EHA-G20
Battery Side							
Battery Type		LFP(LiFePO <sub>4</sub> )					
Nominal Battery Voltage (V)		380					
Battery Voltage Range (V)		350 ~ 550					
Start-up Voltage (V) <sup>1</sup>		380					
Number of Battery Input		1					
Max. Continuous Charging Current (A)	11.9	14.3	19.8	23.7	31.6	35.6	
Max. Continuous Discharging Current (A)	8.7	10.5	14.5	17.4	23.2	29.0	
Max. Charging Power (kW)	4.5	5.4	7.5	9.0	12.0	13.5	
Max. Discharging Power (kW)	3.3	3.96	5.5	6.6	8.8	11.0	
PV Side							
Max. Input Power (kW)	6.0	7.2	10.0	12.0	16.0	20.0	
Max. Input Voltage (V) <sup>2</sup>		600					
MPPT Operating Voltage Range (V) <sup>3</sup>		40 ~ 560					
Start-up Voltage (V)		50					
Nominal Input Voltage (V)		400					
Max. MPPT Current (A)		20					
Max. MPPT Short Circuit Current (A)		26					
Number of MPPTs	2	2	2	2	4	4	
Number of Strings per MPPT	1 / 1	1 / 1	1 / 1	1 / 1	1 / 1 / 1 / 1	1 / 1 / 1 / 1	
AC Side (On-grid)							
Nominal Power (kW)	3.0	3.6	5.0	6.0	8.0	10.0	
Nominal Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	10.0	
Max. Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	10.0	
Max. Apparent Power from Grid (kVA)	6.0	7.2	10.0	12.0	14.5	14.5	
Nominal Voltage (V)		220 / 230 / 240, L / N / PE					
Voltage Range (V)		170 ~ 280					
Nominal Frequency (Hz)		50 / 60					
Frequency Range (Hz)		45 ~ 55 / 55 ~ 65					
Max. Current to Grid (A)	13.7 @ 220V 13.1 @ 230V 12.5 @ 240V	16.4 @ 220V 15.7 @ 230V 15.0 @ 240V	22.8 @ 220V 21.8 @ 230V 20.9 @ 240V	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	36.4 @ 220V 34.8 @ 230V 33.4 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V	
Max. Current From Grid (A)	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	32.8 @ 220V 31.4 @ 230V 30.0 @ 240V	45.5 @ 220V 43.5 @ 230V 41.7 @ 240V	50.0 @ 220V 50.0 @ 230V 50.0 @ 240V	63.0 @ 220V 63.0 @ 230V 60.5 @ 240V	63.0 @ 220V 63.0 @ 230V 60.5 @ 240V	
Power Factor		~1 (Adjustable from 0.8 leading to 0.8 lagging)					
THDi		<3%					
Back-up Side							
Nominal Output Apparent Power (kVA)	3.0	3.6	5.0	6.0	8.0	10.0	
Max. Output Apparent Power (kVA)	3.0 (6.0, 10s)	3.6 (7.2, 10s)	5.0 (10.0, 10s)	6.0 (12.0, 10s)	8.0 (16.0, 10s)	10.0 (20.0, 10s)	
Max. Output Apparent Power (Bypass) (kVA)	6.0	7.2	10.0	12.0	14.5	14.5	
Max. Output Current (A)	13.7 @ 220V 13.1 @ 230V 12.5 @ 240V	16.4 @ 220V 15.7 @ 230V 15.0 @ 240V	22.8 @ 220V 21.8 @ 230V 20.9 @ 240V	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	36.4 @ 220V 34.8 @ 230V 33.4 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V	
Max. Output Current (Bypass) (A)	27.3	32.8	45.5	50.0	63.0	63.0	
Nominal Output Voltage (V)		220 / 230 / 240, L / N / PE					
Nominal Output Frequency (Hz)		50 / 60					
THDv (@Linear Load)		<3%					
Efficiency							
Max. Efficiency	97.6%	97.6%	97.6%	97.6%	97.5%	97.5%	
European Efficiency	96.5%	96.5%	96.8%	97.0%	96.8%	96.8%	
Max. Battery to AC Efficiency	98.0%	98.0%	98.0%	98.0%	97.8%	97.8%	
Protection							
PV String Current Monitoring		Integrated					
PV Insulation Resistance Detection		Integrated					
Residual Current Monitoring		Integrated					
PV Reverse Polarity Protection		Integrated					
Battery Reverse Polarity Protection		Integrated					
Anti-islanding Protection		Integrated					
AC Overcurrent Protection		Integrated					
AC Short Circuit Protection		Integrated					
AC Overvoltage Protection		Integrated					
DC Surge Protection		Type II					
AC Surge Protection		Type II					
RSD		Optional					
AFCI		Integrated					
Remote Shutdown		Integrated					
General Data							
Operating Temperature Range (°C)		-35 ~ +60 (Derating at +40)					
Relative Humidity		0 ~ 95%					
Max. Operating Altitude (m)		4000 (>2000 derating)					
Cooling Method		Natural convection					
User Interface		LED, WLAN + APP					
Communication with BMS		CAN					
Communication		RS485, WiFi + LAN + Bluetooth					
Communication Protocols		Modbus-RTU, Modbus-TCP					
Weight (kg)	24	24	24	24	26	26	
Dimension (W x H x D mm)		800 x 300 x 270					
Noise Emission	≤30	≤30	≤30	≤30	≤35	≤35	
Topology		Non-isolated					
Ingress Protection Rating		IP66					
Mounting Method		Wall / Floor Mounted					

\*1: If there's no PV, start-up voltage will be 380V.

\*2: When the input voltage is 560V-600V, the inverter will enter standby mode, and the voltage returns to 560V to enter the normal operation state.

\*3: Please refer to the user manual for the MPPT Voltage Range at Nominal Power.


∴ Please visit GoodWe website for the latest certificates.

Technical Data		GW5.1-BAT-D-G20	GW8.3-BAT-D-G20	GW5.1-BAT-D-G21	GW8.3-BAT-D-G21
Rated Energy (kWh)		5.12	8.32	5.12	8.32
Usable Energy (kWh) <sup>*1</sup>		5	8	5	8
Battery Type		LFP (LiFePO <sub>4</sub> )			
Operating Voltage Range (V) (single phase system)		350 ~ 550			
Operating Voltage Range (V) (three phase system)		700 ~ 950			
Max. Input Current (System) (A)		12	19	12	19
Max. Output Current (System) (A)		13.2	21.0	13.2	21.0
Max. Input Power (System) (kW) <sup>*2</sup>		5	8	5	8
Max. Output Power (System) (kW) <sup>*2</sup>		5	8	5	8
Peak.Output Power (System) (kW) <sup>*2</sup>		7.5 @ 10s	12 @ 10s	7.5 @ 10s	12 @ 10s
Charging Temperature Range (°C)		-18 ~ +55	-18 ~ +55	+2 ~ +55	+2 ~ +55
Discharging Temperature Range (°C)		-20 ~ +55			
Relative Humidity		5 - 95%			
Max. Operating Altitude (m)		4000			
Noise Emission (dB)		≤29			
Communication		CAN			
Weight (kg)		57.5 ± 1	79.0 ± 1	57.5 ± 1	79.0 ± 1
Dimensions (W × H × D mm)		800 × 326 × 270			
Optional Function Configuration		Heating	Heating	-	-
Ingress Protection		IP66			
Max. Storage Time		12 months (-20°C ~ +35°C) 6 months (+35°C ~ +45°C)			
Scalability		6 pcs			
Mounting Method		Floor stacked / Wall-mounted			
Standard and Certification	Safety	IEC62619, IEC60730, EN62477, IEC63056, IEC62040, CE, CEC			
	EMC	CE, RCM			
	Transportation	UN38.3, ADR			

\*1: Test conditions, 100% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

\*2: Max. Input Power / Max. Output Power / Peak.Output Power derating will occur related to Temperature and SOC.

\*: Please visit GoodWe website for the latest certificates.

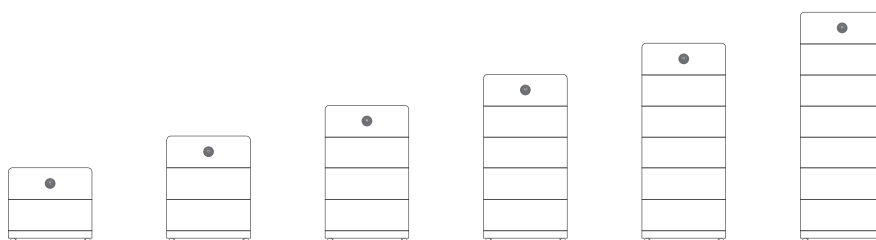

Number of Battery Modules (pcs)	1	2	3	4	5	6
Total Energy Capacity (kWh)	5.12	10.24	15.36	20.48	25.60	30.72
Total Energy Capacity (kWh)	8.32	16.64	24.96	33.28	41.60	49.92